


Temperature probe with Pt 100 Ω sensor TS12

- Sensor: Pt 100 Ω at 0 °C
- Range from -50 °C up to +250 °C
- Stem in AISI 316 L
- Water-tight cable output

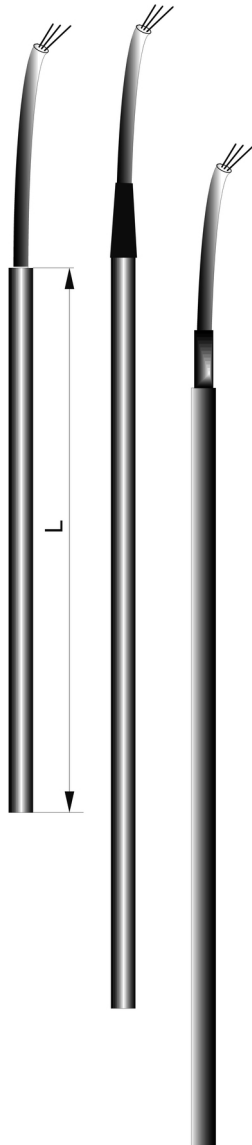

REFERENCES

Model

Fitting

0 None

Material

I AISI 316 L

Stem length L

xxx from 50 to 500 mm

Stem O.D.

04 4.5 mm

06 6 mm

08 8 mm

Sensor

3 Simplex, 3-wire

4 Simplex, 4-wire

6 Duplex, 2x 3-wire

Accuracy

A Class A

B Class B

Output cable

P PVC

F PFA

Cable length

xxx In metre

TS12 0 I 100 06 3 B P 010

(Example)

LIMITS OF USE

PVC cable	-10 ... +80 °C
PFA cable	-50 ... +250 °C

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Temperature probe with Pt
100 Ω sensor
TS12

11-04-2019

D-612.01-EN-AA

612-01 /1