

Dissolved oxygen monitor BAMOWIZ 452



- Graphic color touch-sensitive screen
- Dissolved oxygen monitoring:
0... 20 mg/l ; 0 ... 500 %
- 1 Input for BAMOX 453 probe
- 1 Analogue output 0/4-20 mA
- 3 Relays (Trigger points, Alarm)
- 2 Analogue inputs 4-20 mA

APPLICATIONS

The BAMOWIZ 452 offers a reliable and accurate measurement solution for the dissolved oxygen concentration (ODO) in the fields of water treatments:

- Water treatment station (e.g.: Aeration basin)
- Rivers, lakes
- Fish farming and aquaculture

DESCRIPTION

Associated with the BAMOX 453 probe (data-sheet 453-01), the BAMOWIZ 452 allows the measurement, continuously, of oxygen dissolved concentration in the water. With this set, the atmospheric pressure, water temperature and conductivity, are considered to display a reliable and accurate measurement (compensated).


BAMOWIZ has a colour touch-sensitive screen to navigate through an intuitive and multilingual menu; It procures a large display for easy readings of measurements and operating status. To facilitate commissioning, a menu acting on the analog output and the thresholds is used to simulate the measurement.

The BAMOWIZ 452 has two more inputs; Both as 4-20 mA analogue signal (power supplied to sensors).

One of the 3 measurements can be transmitted through the 4-20mA output.

A complete system includes:

- A dissolved oxygen monitor BAMOWIZ 452
- A dissolved oxygen optical probe BAMOX 453 (data-sheet 453-01)
- A probe holder 9453 (data-sheet 453-01)
- An extension cable (between probe holder and monitor) type C8B

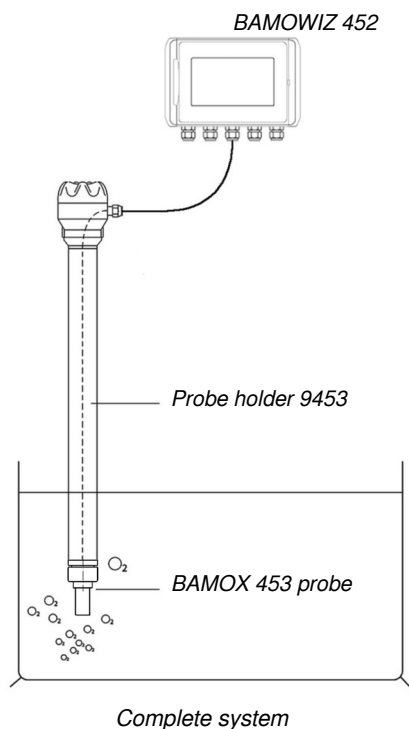

CODE NUMBERS AND REFERENCES

Code	Reference	Description
452 001	BAMOWIZ 452	Dissolved oxygen monitor for BAMOX 453 probe

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Dissolved oxygen monitor
BAMOWIZ 452

04-02-2021

D-452.01-EN-AB

OXY

452-01 /1

TECHNICAL FEATURES

Interface

Screen	Graphic color touch-sensitive; size 4/3 480 x 272 pixels
Languages	English; French; German; Polish; Portuguese; Spanish Alphanumeric touch keyboard dedicated for each language

Inputs:

Digital signal	1 Input for probe BAMOX 453
Analogue signals	2 Inputs of 4–20 mA; 2-wire; 12 V DC / 0 ... 20 mA (Load: 50 Ω)

Parameters of measurement compensation:

Temperature	Automatic: Built-in NTC (inside the probe BAMOX 453)
Atmospheric pressure	Manually between 500 and 1100 hPa
Salinity	Manually between 0 to 60 g/kg

Outputs:

Output signal	1 Analogue output 4–20 mA (with or without linearization)
Relays	3 N.O. contacts, potential free
Adjustable trigger points	1 to 8 trigger points, to assign at 2 or 3 relays
Switching power	3 A / 250 V AC
Hysteresis	Adjustable from 0 to 100 %
Delay	Adjustable from 0 to 9999 s

Other operations:

- Linearization (20 points) on 1 input signal 4-20 mA
- Bargraph display of each measurement signal
- Display of Minima and Maxima values

Electrical specifications


Main power	100 ... 240 V AC 50/60 Hz
Consumption	Max. 5 VA
Cable connections	Screw terminals
Cable inlets	5 Cable glands, PG 9

Environnement

Mounting	Wall mount cabinet, in ABS; IP 65
Ambient temperature	-10 ... +50 °C

EC Conformity: The instrument meets the legal requirements of the current European Directives.

DIMENSIONS

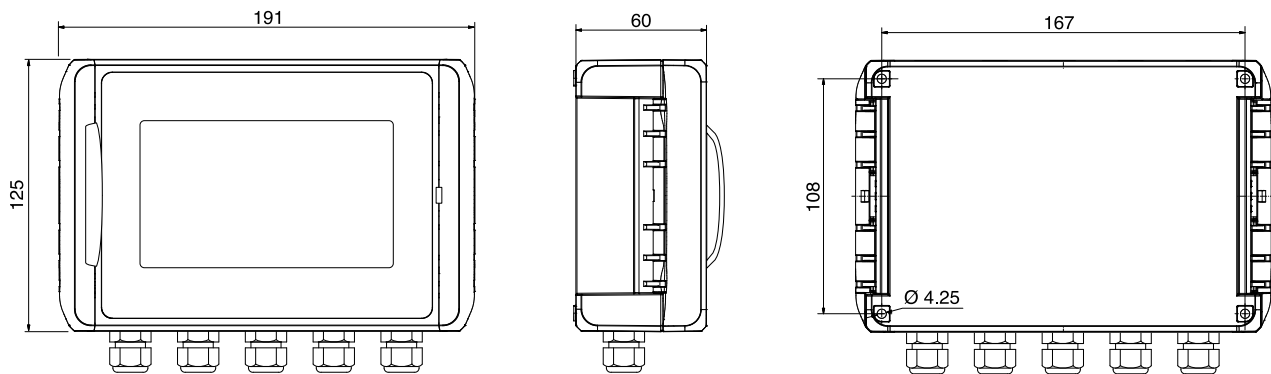

BAMO INTERNATIONAL

22, Rue de la Voie des Bans · Z.I. de la gare · 95100 ARGENTEUIL

Tel +33 (0)1 30 25 83 20 Web www.bamo.eu

Fax +33 (0)1 34 10 16 05 E-mail export@bamo.fr

Dissolved oxygen monitor
BAMOWIZ 452

04-02-2021

D-452.01-EN-AB

OXY

452-01 /2